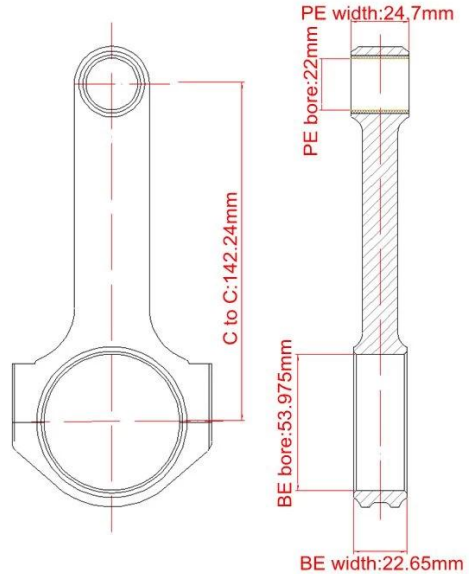


5.600" H-Beam Connecting Rods Main Sizes

Brand: Hurricane	
Center to Center Length: 142.24mm/5.600"	
Big End Bore Diameter: 53.975mm/2.125"	
Big End Width: 22.65mm/0.892"	
Small End Bore Diameter: 22mm /0.866"	
Small End Width: 24.7mm/0.972"	
Beam Style: H-beam	


Type 1 Journals, Balanced, Set of 4, 5.600" Connecting Rods Features

Connecting Rod Bolt Diameter	3/8"
Approximate Connecting Rod Weight	XXXg
Advertised Horsepower Rating	600hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Hurricane vw beetle H-beam 5.600" connecting rods

Description


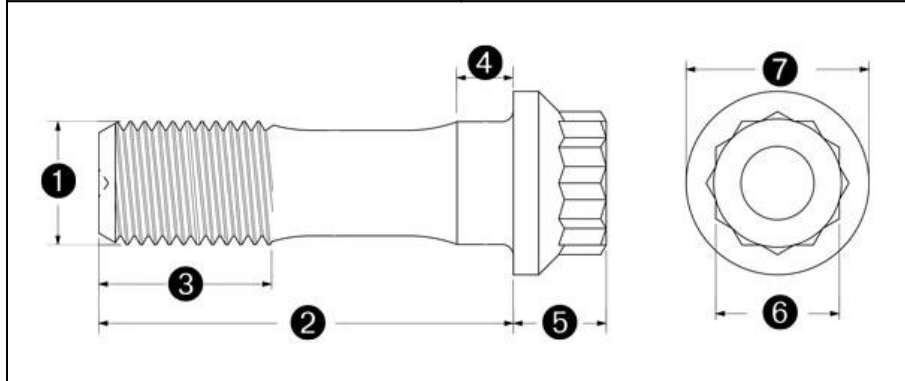
5.600" H-Beam Connecting Rods, Type 1 Journals, Balanced, Set of 4 begin as new chromoly forgings instead of used stock rod cores. These are clearanced for stroker use, minimizing your expense and elbow grease required for installation! These are a fantastic rod

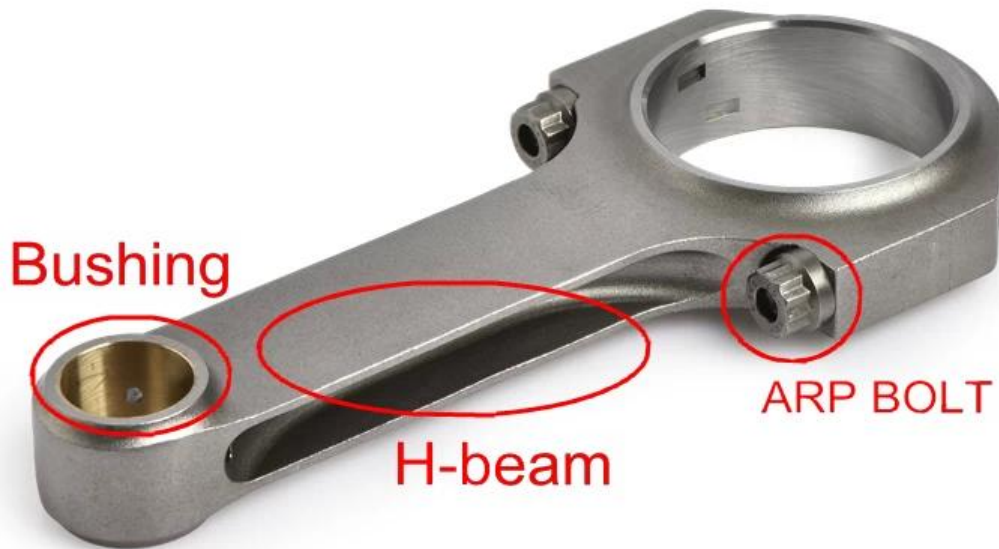

Technical Specifications:

1. Design:H-beam
2. Forged 4340 steel
3. Bushingcopper bush:QAL10-3-1.5
4. Dowel:40Cr,HRC40-42
5. Bolt torque:3/8-75N*M
6. Packing:4pcs/set
7. Balance weight within +/-1g

With ARP2000 bolt

 <p>ARP automotive racing products Professional Quality Fasteners</p> <p>ARP Ultra-Torque[®] FASTENER ASSEMBLY LUBRICANT Use to precisely duplicate all ARP fastener preload specifications Part # 100-9008 .5 oz.</p>	<p>Rod bolts - 3/8" Specifications: 3/8</p> <ol style="list-style-type: none"> 1) Thread Size:5/16" 2) UHL:1.500" 3) Thread Length:0.550" 4) Grip Length:0.100" 5) Head Height:0.348" 6) Wrench Size:3/8" 7) Collar Dia.:0.526" 	<p>Rod bolts-5/16" Specifications: 5/16</p> <ol style="list-style-type: none"> 1) Thread Size:5/16" 2) UHL:1.500" 3) Thread Length:0.550" 4) Grip Length:0.150" 5) Head Height:0.348" 6) Wrench Size:3/8" 7) Collar Dia.:0.526"
	 <p>Technical drawing of a rod bolt showing dimensions 1 through 7. The drawing includes a side view and a top view. The side view shows the thread (1), UHL (2), thread length (3), grip length (4), head height (5), and collar diameter (6). The top view shows the collar diameter (7).</p>	

Race connecting rods for Drag racing

Besides standard rods that can be machined and provided directly, custom rods can be provided for you also. Then three ways to start:

1. Used sample to us directly, address: [Middle Ring Shuangjing Rd Chengdu Sichuan 610081 China](#)
2. Full drawing to our email: marketing@hurricane-rod.com.cn
3. [Custom Form online](#)



Related rods:

1. [Hurricane 4340 5.394" H-Beam Connecting Rods, Chevy Journals, 3/8" ARP 2000 Bolts, Balanced, Set of 4](#)
2. [5.400" 4340 Forged Chromoly H-Beam Connecting Rods, Standard Bolts, Chevy Journals, Balanced, Set of 4](#)
3. [H-Beam Connecting Rods, 5.500" Length, Chevy Journal 2.000"/51mm - Hurricane Speed and Performance](#)