

Brand: Hurricane  
Engine: Audi S4 2.7T 30V and 2.8L V6  
Part Type: Connecting Rods  
Center to Center Length: 154mm/6.063"  
Big End Bore Diameter: 56.80mm/2.236"  
Big End Width: 20.12mm/0.792"  
Small End Bore Diameter: 21.005mm /0.827"  
Small End Width: 21.92mm/0.863"  
Beam Style: X-beam  
Connecting Rod Bolt Diameter: 5/16"  
Quantity :6pcs/set  
Approximate Connecting Rod Weight: 550g/piece  
Advertised Horsepower Rating: 1100hp  
Material: Forged 4340 steel  
Connecting Rod Finish: Shot-peened, Polished  
Pin: Bronze wrist pin bushings  
Wrist Pin Style: Floating  
Cap Retention Style: Cap screw  
Weight Matched Set: Yes ,Balanced +/- 1g  
Magnafluxed: Yes  
Private Label: Yes ,available  
Custom design: Yes, accept


These X-beam rods are full-machined and shot peened, they are with rifle drill design which puts a small pathway through the rod center to the wrist pin, it allows pressurized oil from the rod bearing to the wrist pin, reducing the wearing and friction between the rod and piston to extend wrist pin and bushing life. But it is not required .

#### CONNECTING ROD FITMENT

Audi - S4 1996-2001 (B5 - B5.5) 2.7T 30V V6 engines\*  
Audi - RS4 1996-2001 (B5 - B5.5) 2.7T 30V V6 engines\*  
Audi - A4 1996-2001 (B5 - B5.5) 2.8L 30V V6 engines\*  
Audi - A6 1998-2004 (C5) 2.8L 30V V6 & 2.7T 30V V6 engines\*  
Audi - A6 Allroad 1998-2004 (C5) 2.8L 30V V6 & 2.7T 30V V6 engines\*  
Audi - A8 1994-2002 (D2) 2.8L 30V V6 engines\*  
VW - Passat 1998-2005 (B5 - B5.5) 2.8L 30V V6 engines\*

Hurricane also provides various beam design for Audi S4 2.7T 30V and 2.8L V6 applications, including H-beam, X-beam, I-beam and Custom with rifle drilled, you can leave a message here or view a article to learn more details, then let us what you are thinking.

[\*\*Hurricane Connecting Rod Features - Various Beam Designs\*\*](#)

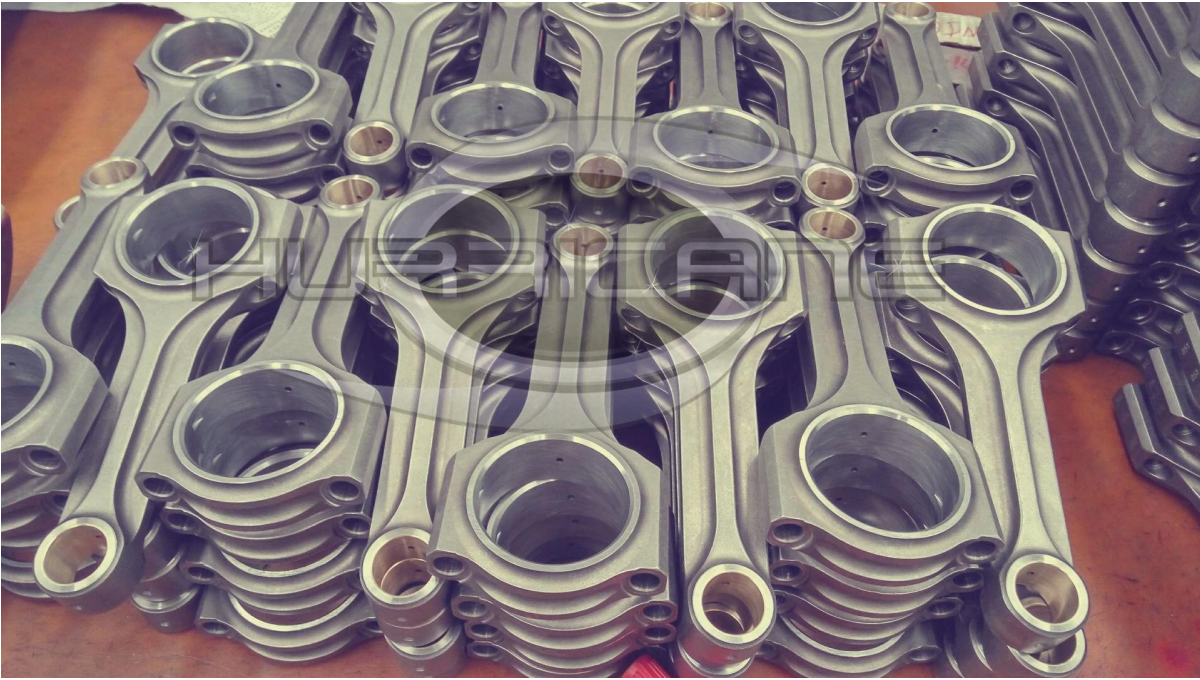

Any further question for these connecting rods , please feel free [contact](#) us .