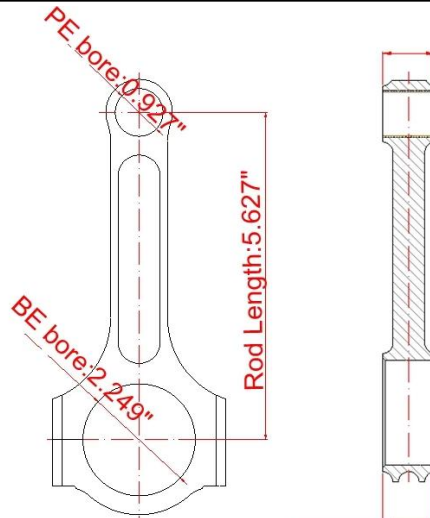


Holden 142.93mm Connecting Rods Main Sizes

Brand: Hurricane *	
Center to Center Length: 142.93mm/5.627"	
Big End Bore Diameter: 57.12mm/2.249"	
Big End Width: ~	
Small End Bore Diameter: 23.55mm /0.927"	
Small End Width: ~	
Beam Style: I-beam	


Holden 308 connecting rod & rods more details

Connecting Rod Bolt Diameter	~
Approximate Connecting Rod Weight	XXXg
Advertised Horsepower Rating	600hp
Quantity	Sold as 6 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom rods design	Yes, accept

HOLDEN 308 / 355 "I"-BEAM connecting rods & conrods

Description

Hurricane Speed and Performance's own 4340 steel forged connecting rods. These rods are fully finished to suit all Holden 308/355 engines both factory or aftermarket.

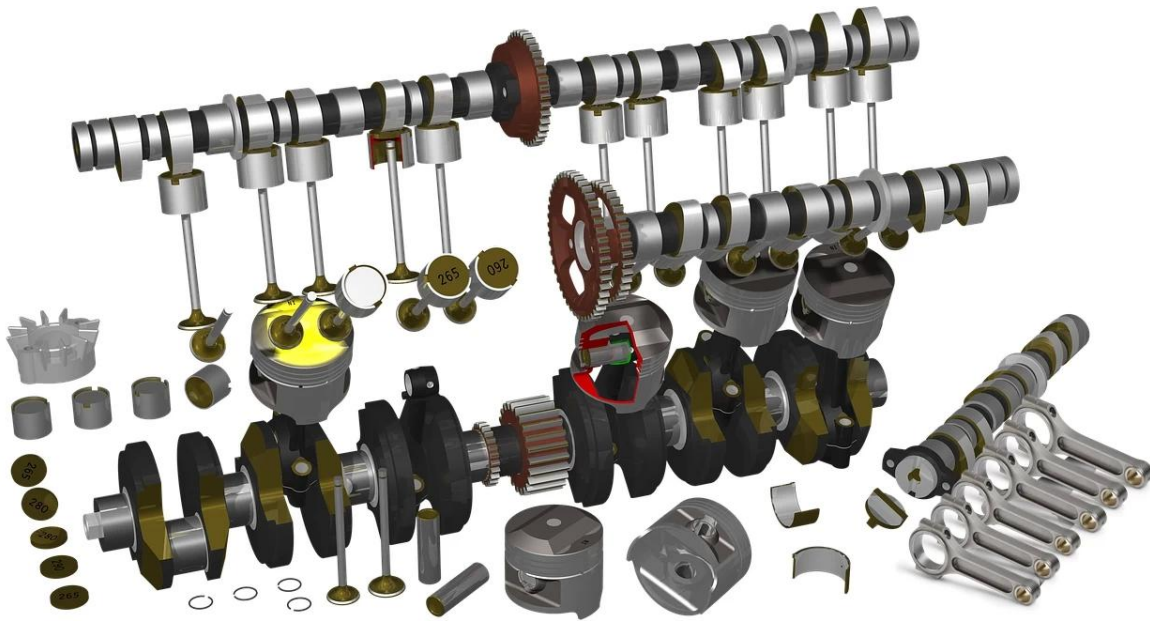

Featured product: **HOLDEN L67 SUPERCHARGED 3.8L V6 - forged 4340 steel H-beam connecting rods**



Note: One-piece forging, HRC:34-38. the material is handled by tongs and placed in each of con rod impressions carved into a die block. As the hammer runs the hammer, he displaces the soft, white hot metal into each impression, gradually forming the connecting rod. The hammer, which imposes a force of 3,000lbs, impacts the material one strike per second. Three strikes of the hammer and the con rod is forged.



Note: this is single oil hole for . **Double Oil PE Reservoirs** can be provided if necessary.

Basis on standard rods, custom rods can be provided if drawing or used sample could be provided. Take a look at factory price...you can't even resize your old rods and fit new rod bolts for this price. If you are interested, please **contact us online**, or leave an message to email: marketing@hurricane-rod.com.cn