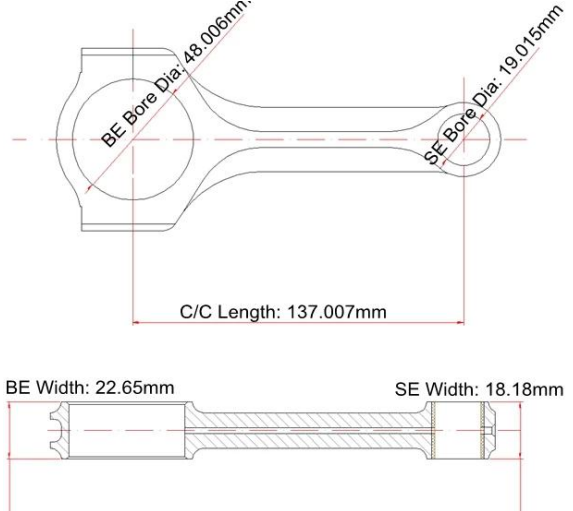


# Honda D16Z6 5.394" X-beam Conrods Main Dimensions

Brand: Hurricane	
Center to Center Length: 137.007mm/5.394"	
Big End Bore Diameter: 48.006mm/1.890"	
Big End Width: 22.65mm/0.892"	
Small End Bore Diameter: 19.015mm /0.749"	
Small End Width: 18.18mm/0.716"	
Beam Style: X-beam	

# Honda D16Z6 5.394" X-beam Conrods Features

Connecting Rod Bolt Diameter	3/8"
Approximate Connecting Rod Weight	XXX
Advertised Horsepower Rating	600hp
Quantity	Sold as 4 pieces /set
Material	<a href="#">Forged 4340 steel</a>
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

## Additional Description :

- 1). Designed and engineered for high performance Honda D16Z6 race engines .
- 2). They can handle over 600hp per cyclinder .

- 3). Fully CNC machined on all surfaces for high strength.
- 4) . Hardness after quenching and tempering is HRC34-38.
- 5). 2 piece forging for improved strength.
- 6). High strength dowelled cap to achieve precision alignment .
- 7). **Shot Peening** for improved fatigue life.

**Hurricane Shot peened X-beam Forged Connecting Rods Picture**



**Hurricane X-beam Forged Connecting Rods Packing Pictures**



Please don't hesitate to contact us if you have any further question . mail to [marketing@hurricane-rod.com.cn](mailto:marketing@hurricane-rod.com.cn).