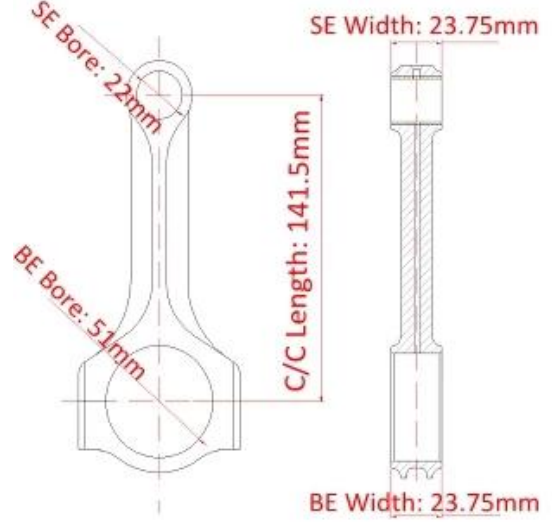


## H23 Connecting Rods Main Sizes

Brand: Hurricane*	
Center to Center Length: 141.50mm/5.571"	
Big End Bore Diameter: 51.01mm/2.008"	
Big End Width: 23.75mm/0.935"	
Small End Bore Diameter: 22.01mm /0.867"	
Small End Width: 23.75mm/0.935"	
Beam Style: X-beam	

## Honda/Acura H23/F22 Connecting Rods More Details

Connecting Rod Bolt Diameter	3/8 "
Approximate Connecting Rod Weight	~
Advertised Horsepower Rating	700hp
Package	4 pieces per set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes, available
Custom design	Yes, accept

## Honda Prelude Si H23 H23A Conrods Features

Hurricane H23 Connecting Rods are forged from SAE 4340 steel for superior strength. Hurricane replacement 3/8 bolts and alignment sleeves are used for durability and precise cap location. Honda Prelude Si H23 H23A Conrods are Shot Peened for improved fatigue life and balance weight matched to +/- 1g per set. X beam Connecting Rods Set for Honda Acura H23 /F22 2.2L 2.3L are the perfect choice for engines up to 700 horsepower.



## **Fitment:**

**Honda Prelude, Accord, Rover 1.4L I4**

**Honda H23 | Honda H23A | Honda F22 | Acura F22 | Acura H23**

If you have any question about this product or need any further information, please feel free to [contact us](#). Our experianced sales staff is here to assist you any way they can.

**1994 Honda Prelude Si Car**



Note: Picture from Flickr.