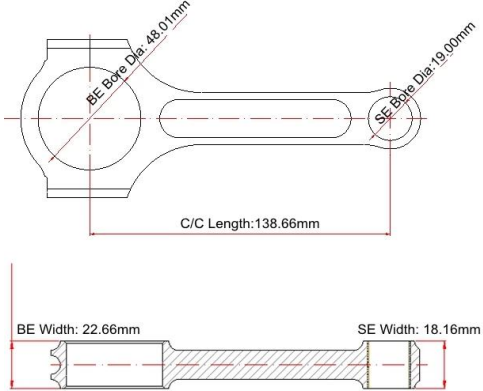


# Honda D16L Connecting Rods Mian Dimensions

Brand: Hurricane	
Center to Center Length: 138.66mm/5.459"	
Big End Bore Diameter: 48.01mm/1.890"	
Big End Width: 22.66mm/0.892"	
Small End Bore Diameter: 19.00mm /0.748"	
Small End Width: 18.16mm/0.715"	
Beam Style: I-beam	

## Honda D16L Connecting Rods Features

Connecting Rod Bolt Diameter	3/8"
Approximate Connecting Rod Weight	XXX
Advertised Horsepower Rating	700hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

## Products Description :

1). Per D16L I-Beam connecting rods are forged from [high quality 4340 \(En24\) steel](#).

2). I-Beam Shape for extra rigidity, per rod designed, manufactured and tested to meet high quality standard .



3). All surfaces polished and shot peened for more fatigue strength.



4). Magnaflux Inspected and Dimensionally Inspected .

5).100% CNC machined for optimum reliability .

6). Optimal balancing for weight matched sets  $\pm$  1gram.



For more I-beam beam style for Hurricane connecting rods ,you can click the link to view more :

[\*\*Hurricane Connecting Rod Features - Various Beam Designs\*\*](#)

Any further question, please don't hesitate to [\*\*contact\*\*](#) us .