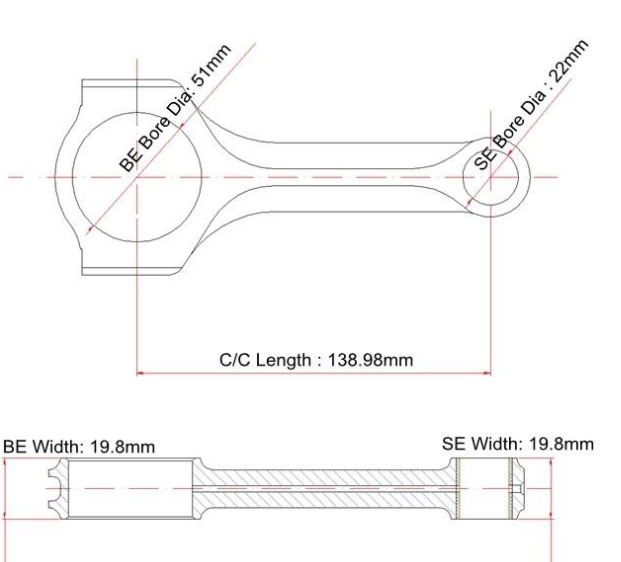


Honda K20 138.98mm X-beam Conrods Main Dimensions

Brand: Hurricane	
Center to Center Length: 138.98mm/5.472"	
Big End Bore Diameter: 51mm/2.008"	
Big End Width: 19.8mm/0.7795"	
Small End Bore Diameter: 22mm /0.8661"	
Small End Width: 19.8mm/0.7795"	
Beam Style: X-beam	

Honda K20 138.98mm X-beam Conrods Features


Connecting Rod Bolt Diameter	3/8 "
Approximate Connecting Rod Weight	560g
Advertised Horsepower Rating	550hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Additional Description:


- 1). MOQ: 100pcs per model .
- 2). 100% CNC Machined from premium 4340 forged steel forgings .
- 3). [Various beam style](#) is available .



4). Custom laser mark can be made on the rods .

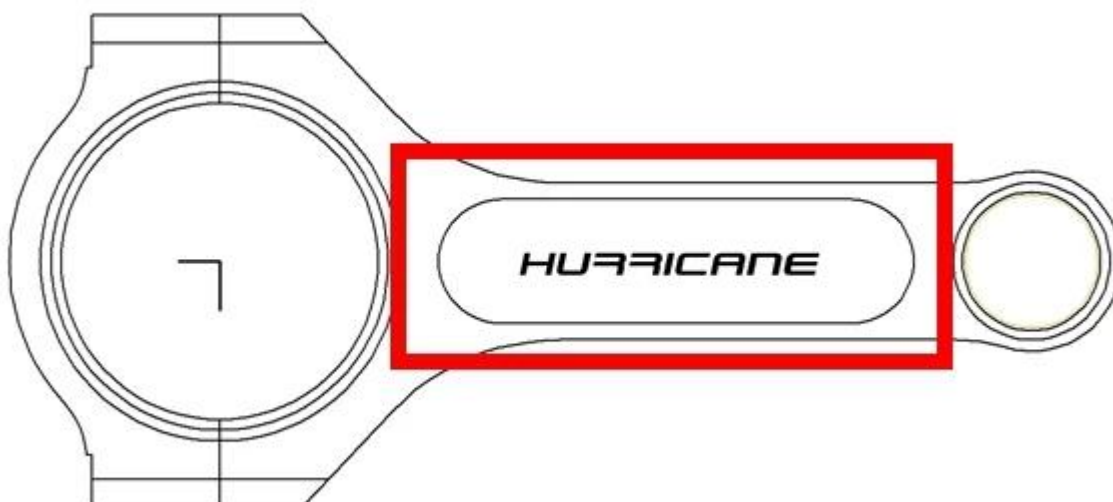


5). [Custom Connecting Rods](#) Sizes are acceptable, welcome to click following picture to download and fill out, email to us directly .



Hurricane Speed & Performance - Custom Connecting Rod Form

SPECIEF UNITS: _____ MM OR IN

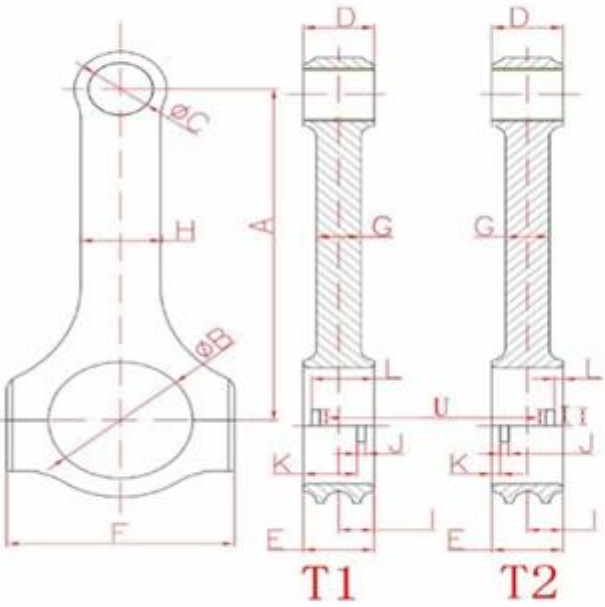

A. _____
Center to Center length/中心距

C. _____
Pin End Bore/小孔

E. _____
Big End Width/大端厚度

G. _____
Beam Thickness/杆厚

I. _____
BE Offset

K. _____
Tang Position

V. _____
Tang Depth/瓦槽深度

U. _____
Tang Length/瓦槽长度

O. _____
Piece/Set 只/组

P. _____
Bolt Diameter(Inch)螺栓规格

R. _____
Bolt Length(Inch)螺栓长度

B. _____
Big End Bore/大孔

D. _____
Pin End Width/小端厚度

F. _____
Overall BE Width/肩宽

H. _____
Beam Width/杆宽

S. _____
T1 Or T2 反瓦/正瓦


J. _____
Tang Width/瓦槽宽度

L. _____
Tang Position

M. _____
H-beam,X-beam,I-beam/设计

N. _____
Engine Model/发动机型号

Q. _____
Piece (Quantity)数量



Hurricane connecting rods factory picture

