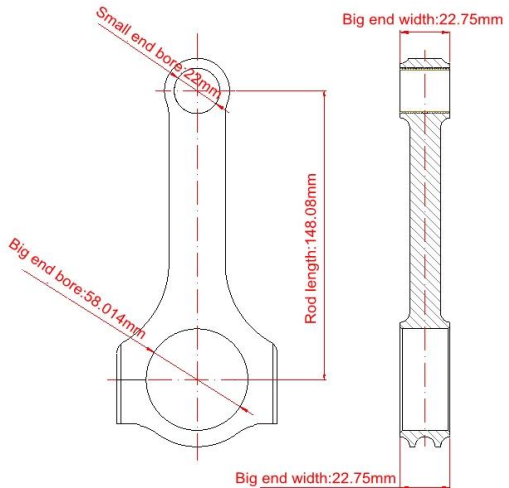


## Hurricane Toyota 3VZFE 5VZFE racing connecting rods Main Sizes

Brand: Hurricane*	
Center to Center Length: 148.08mm/5.830"	
Big End Bore Diameter: 58.014mm/2.284"	
Big End Width: 22.75mm/0.896"	
Small End Bore Diameter: 22mm /0.866"	
Small End Width: 22.75mm /0.896"	
Beam Style: H-beam	

## H beam forged connecting rod for Toyota 5vz 3.4L Features

Connecting Rod Bolt Diameter	5/16"
Approximate Connecting Rod Weight	~
Advertised Horsepower Rating	800hp
Quantity	Sold as 6pieces /set
Material	<a href="#">Forged 4340 steel</a>
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

## Forged Connecting Rods Set 3VZFE 5VZFE, set of 6 Description

Hurricane racing connecting rod make Toyota 5vzfe H-beam con rods in order to pursue lightness and

strength. Because the rod is made by shaving completely, it can design in the form with no futile, and can manufacture in suitable weight which meet marketing and customers needs fully. The big end hone with final sizes, tolerance:  $+0.013\text{mm}$ . And, hurricane connecting rod  $5/16"$  bolts adopt high tension bolts manufactured by us also. We pursue high-quality products by manufacturing in-house until it reaches manufacture from the design.



Note: Mill big end bore



Note:separate cap form connecting rod

If you need more information about them, please contact us here or by email directly  
([marketing@hurricane-rod.com.cn](mailto:marketing@hurricane-rod.com.cn))

## FAQ

A: What is your connecting rod tolerance?

B: Main size: Center to center length: +/- 0.05mm;

Big end bore:+ 0.013mm;

Small end bore:+ 0.005mm;

Big End width: +/-0.02mm;

Pin End width: +/-0.05mm;

No note tolerance:+/-0.15mm

