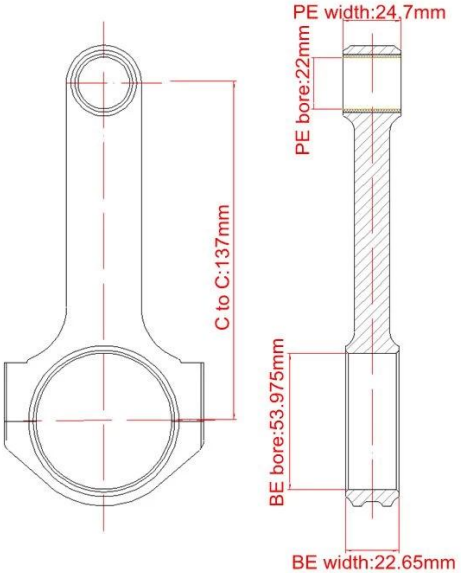


Hurricane 4340 5.394" H-Beam Connecting Rods Main Sizes

Brand: Hurricane	
Center to Center Length: 137mm/5.394"	
Big End Bore Diameter: 53.975mm/2.125"	
Big End Width: 22.65mm/0.892"	
Small End Bore Diameter: 22mm /0.866"	
Small End Width: 24.7mm/0.972"	
Beam Style: H-beam	

Chevy Journals 5.394" H-beam Connecting Rods Features

Connecting Rod Bolt Diameter	3/8"
Approximate Connecting Rod Weight	XXXg
Advertised Horsepower Rating	600hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Hurricane vw parts 5.394", Balanced, Set of 4 conrods

Description


Hurricane Speed and Performance began manufacturing and exporting high performance racing connecting rod since 2000 in Chengdu ,China. All Hurricane race connecting rods are made from high tensile and fatigue resistance 4340 material , designed and checked by full 3D models , 100% Computer Controlled Numeric(CNC) machined , polishing and shot peened. At present, VW aircooled connecting rods with Chevy Journal can be machined, length included:**5.394" 5.400" 5.500" 5.600" 5.700"**.

Save weight and add performance with Hurricane's forged 4340 Chromoly H-Beam Connecting Rods. With a length of 5.394 inches and Chevy Journals of 2.000inch/51mm, these H-Beam Connecting Rods are made to fit with our stroker cranks. Sets of four are sold in matching weight and have a recommended torque of 26 ft. lbs.

With 3/8" ARP2000 bolt as follows:

Material ARP2000

- 1) Thread Size:5/16"
- 2) UHL:1.500"
- 3) Thread Length:0.550"
- 4) Grip Length:0.100"
- 5) Head Height:0.348"
- 6) Wrench Size:3/8"
- 7) Collar Dia.:0.526"

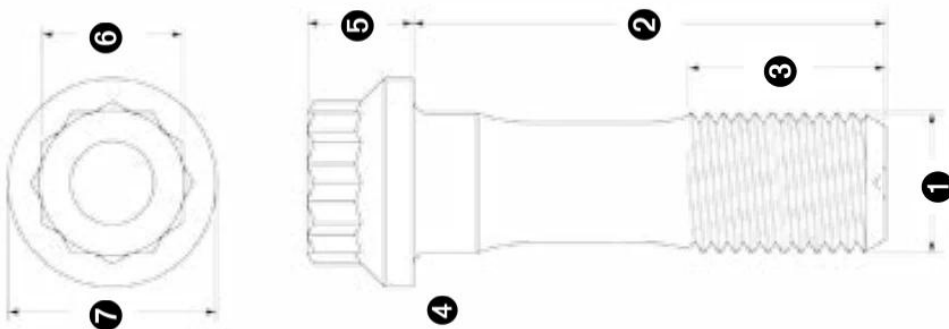



Whether you are building yourself car, or sell into market directly, we can meet your needs. Don't hesitate to contact us directly, marketing@hurricane-rod.com.cn.

