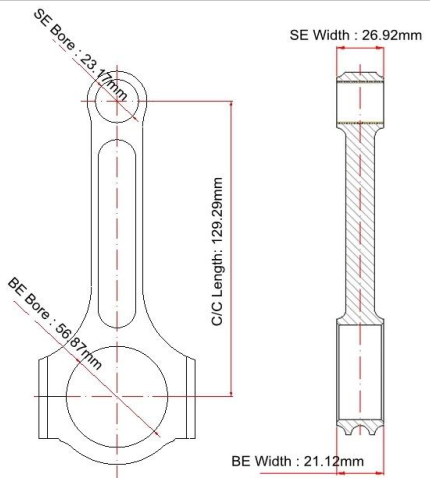


Ford 289/302/5.0L SBF Connecting Rods Main Sizes

Brand: Hurricane	
Center to Center Length: 129.29mm/5.090"	
Big End Bore Diameter: 56.87mm/2.239"	
Big End Width: 21.12mm/0.832"	
Small End Bore Diameter: 23.17mm /0.912"	
Small End Width: 26.92mm/1.060"	
Beam Style: I-beam	

Ford 289/302/5.0L SBF Connecting Rods Features

Connecting Rod Bolt Diameter	7/16"
Approximate Connecting Rod Weight	xxx
Advertised Horsepower Rating	1000hp
Quantity	Sold as 8 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Ford 289/302/5.0L SBF Connecting Rods Description

1.These rods forged from high tensile **4340 steel material** , designed and fully machined to be reliable for Ford 289/302/5.0L SBF racing applications.



2.Manufactured as **I-beam shape** to provide better combination of light weight and strength, each rod heat treated to HRC 34-38 and then shot peened for a higher fatigue strength , packged with 8pcs/set , Optimal balancing for weight matched ± 1 gram per set .



3.Each rod has a oil hole at the top of the **small ends**, so that the oil will drip during the piston's compressing cycle ,then additional lubrication and cooling will be provided .



These rods suits for high horsepower performance engines , and custom connecting rods can be made once drawing or sample provided .

Any question for this rod or Ford custom connecting rods , please feel free contact us online or send email to marketing@hurricane-rod.com.cn.