

Brand: Hurricane  
Engine: Chevy GM 305/350/400  
Part type: Connecting Rods  
Center to center length: 152.40 mm/6.000 "  
Big End bore Diameter: 56.507 mm/2.225 "  
Big end Width: 23.90 mm/0.941 "  
Small end bore Diameter: 23.561 mm/0.928"  
Small end width: 26.96 mm/1.061 "  
Beam style: H-Beam  
Connecting rod bolt Diameter: 7/16 "  
Quantity: sold as 8pcs/set  
Approximate connecting rod Weight: 590/Piece  
Advertised horsepower rating: 1000hp  
Material: Forged 4340 Steel  
Connecting rod finish: Shot-peened, polished  
Pin: Bronze Wrist pine Bushings  
Wrist pin Style: floating  
Cape Town retention style: Cap Screw  
Weight matched set: Yes, balanced +/-1 g  
Magnafluxed: Yes  
Private Label: Yes, available  
Custom design: Yes, accept

Hurricane GM Chevy SBC H-Beam connecting rods are forged from high strength 4340 steel material, fully CNC machined to be more reliable in the automotive racing fields. Each rod is bronze bushed for full floating applications, shot peened to improve fatigue strength, heat treated with 34-38HRC for higher strength, dimensioned inspected for high stability.

**High quality 4340 forgings picture:** each forging is X-rayed , sonic tested and magnafluxed.




[Shot peened connecting rods](#)



### **Finished connecting rods**

**picture** : Per big end and small end are fully honed by SUNNEN machine. High strength dowel sleeves fitted in the rod cap to connect rod beam and cap.

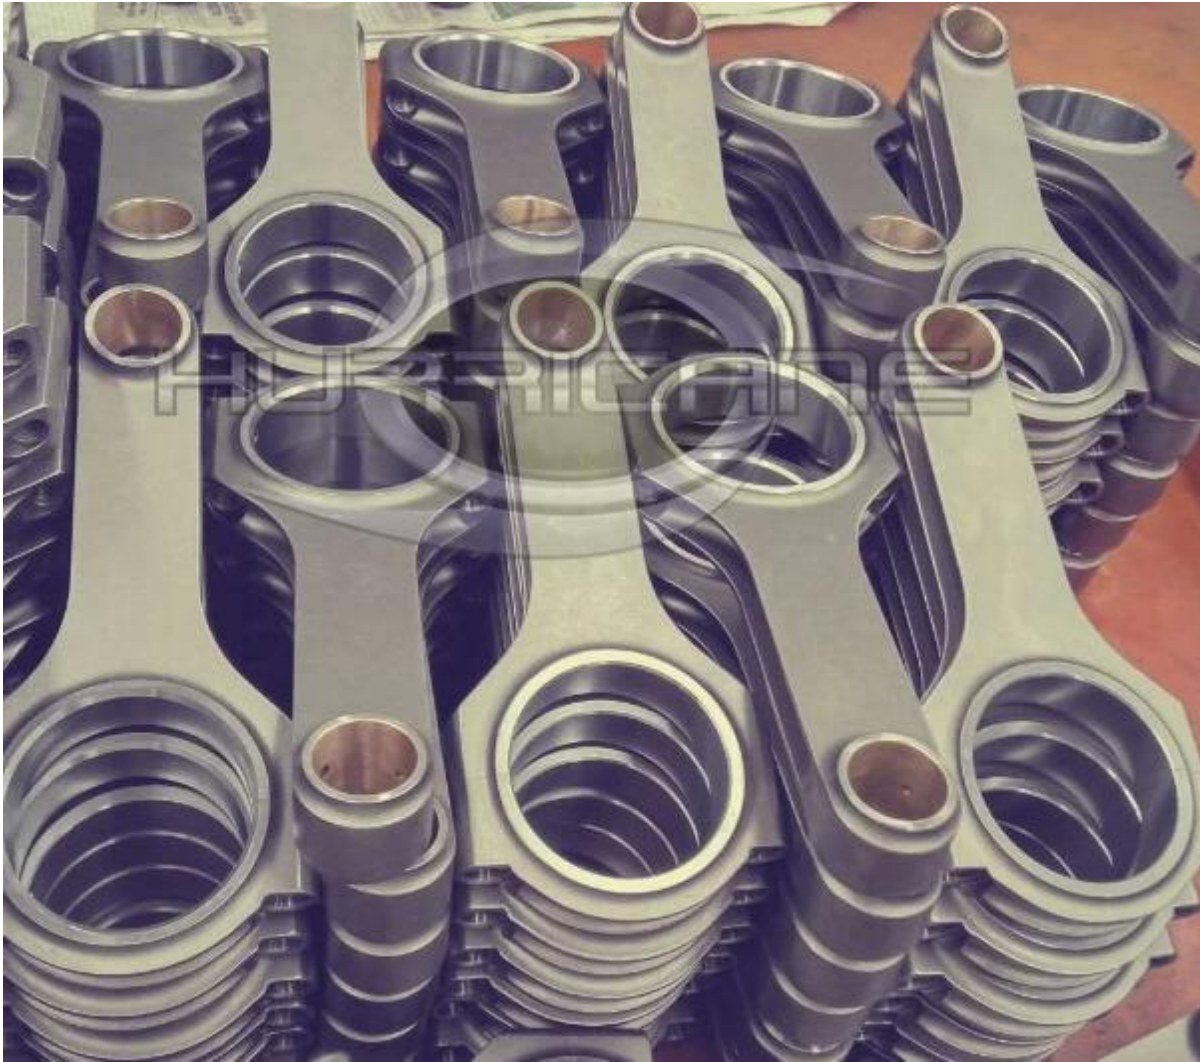

If you are interested in more details of these rods , please feel free contact us online or via [email](#) to us .