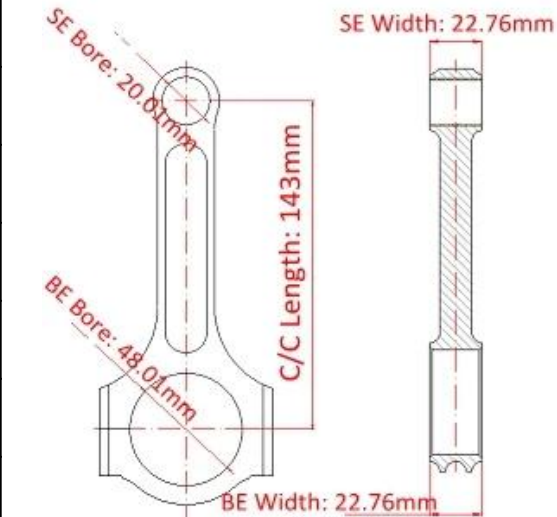


Nissan QR25 I beam Connecting Rods Main Sizes

Brand: Hurricane	
Center to Center Length: 143mm/5.630"	
Big End Bore Diameter: 48.01mm/1.890"	
Big End Width: 22.76mm/0.896"	
Small End Bore Diameter: 20.01mm /0.788"	
Small End Width: 22.76mm/0.896"	
Beam Style: I-beam	

Nissan / Infinti QR25DE Connecting Rods Features

Connecting Rod Bolt Diameter	3/8 "
Approximate Connecting Rod Weight	525g
Advertised Horsepower Rating	800hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Nissan QR25 Connecting Rods Description


Hurricane connecting rods are designed specifically for high horsepower racing engines. With latest CNC machine and skilled staffs, we have supplied stable high quality products to customers all over the world. Those Nissan QR25 I-Beam Connecting Rods improve strength. QAL10-3-1.5 bronze wrist pin bushings installed on Nissan QR25 rods pin end to increased wear resistance, precision alignment sleeves 40Cr dowel to connect cap with rods.You can check the picture below.



Note: Hurricane connecting rod bushings, material: QAL10-3-1.5
material: 40Cr,HRC40-42

Note: Hurricane connecting rod Dowel,

Hurricane [replacement 3/8 connecting rod bolt](#) can be installed on all kind of connecting rods, it is not original ARP2000, but the fasteners are race spec and sold separately. please check the below compare picture.

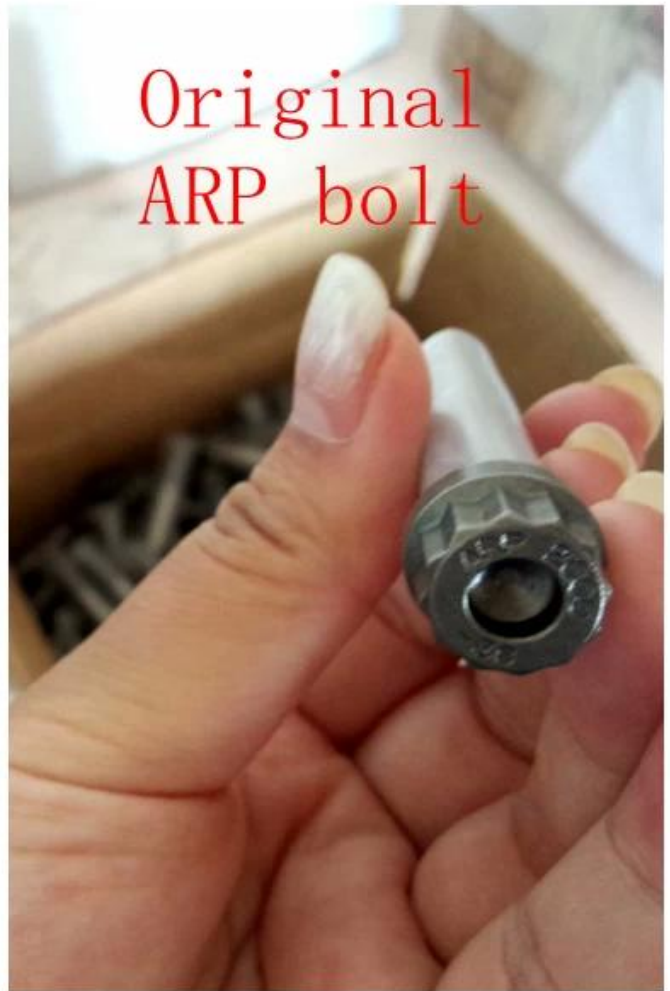

2017 Nissan Sentra Picture



Note: 2017 Nissan Sentra Picture from Hearst Communications, Inc

Any question, welcome to [*leave us message.*](#)