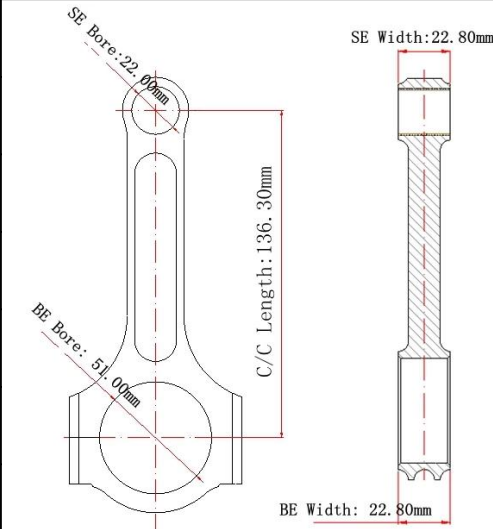


Nissan SR20DET Connecting Rods Main Sizes

Brand: Hurricane	
Center to Center Length: 136.30mm/5.366"	
Big End Bore Diameter: 51.00mm/2.008"	
Big End Width: 22.80mm/0.898"	
Small End Bore Diameter: 22.00mm /0.866"	
Small End Width: 22.80mm/0.898"	
Beam Style: I-beam	

Nissan SR20DET Connecting Rods Features


Connecting Rod Bolt Diameter	3/8 "
Approximate Connecting Rod Weight	xxx
Advertised Horsepower Rating	750hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Nissan SR20DET Connecting Rods Description

These Nissan 2.0L SR20DE SR20DET connecting rods CNC machined from **4340 EN24 aircraft chrome moly forged steel**, using an I-beam design for extra rigidity. Each rod is fully magnafluxed to guarantee the consistency of the forged material, inspected to reach high quality standard, shot peened to improve fatigue life , and honed to meet high tolerance standard . weight matched sets +/- gram, packaged ad sold in 4 pieces /set .



All these Nissan SR20DET connecting rods are suitable for [original \(genuine \) ARP2000 3/8 " rod bolts](#) and [Hurricane Copy ARP2000 bolts](#) , you can choose them according to your budget .

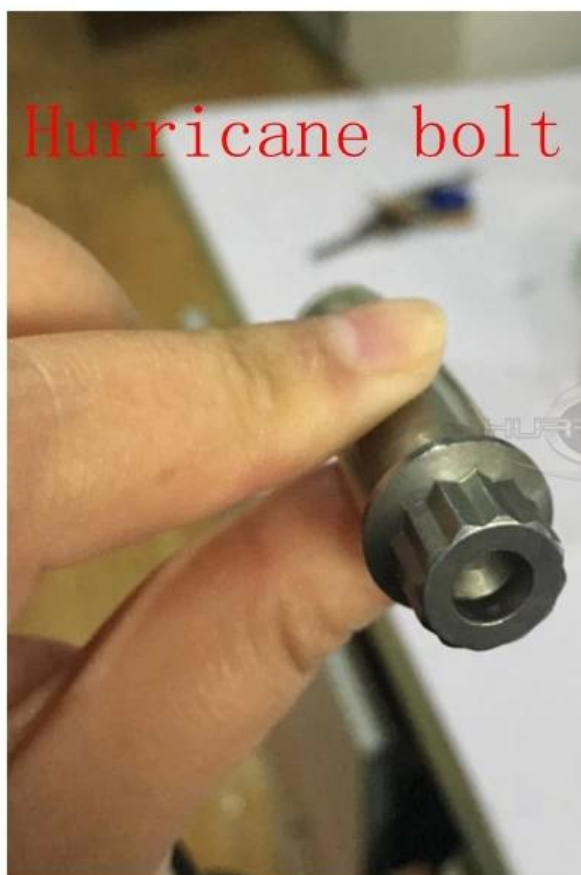

Hurricane Copy ARP2000 Bolts SGS Certification.



Welcome to contact us if any needs for these conrods or bolts .