

Brand: Hurricane
 Engine: BMW M30B28 M30B30 M30B32 M30B35
 Part Type: Connecting Rods
 Center to Center Length: 135mm/5.315"
 Big End Bore Diameter: 52mm/2.047"
 Big End Width: 23.9mm/0.941"
 Small End Bore Diameter: 22mm /0.866"
 Small End Width: 23.9mm/0.941"
 Beam Style: H-beam
 Connecting Rod Bolt Diameter: 3/8"
 Approximate Connecting Rod Weight: 540g/piece
 Advertised Horsepower Rating: 900hp
 Quantity: Sold as 6 pieces /set
 Material: Forged 4340 steel
 Connecting Rod Finish: Shot-peened, Polished
 Pin: Bronze wrist pin bushings
 Wrist Pin Style: Floating
 Cap Retention Style: Cap screw
 Weight Matched Set: Yes ,Balanced +/- 1g
 Magnafluxed: Yes
 Private Label: Yes ,available
 Custom design: Yes, accept

At present, **BMW rods** are among our best-selling list, there is a list that you could purchase anytime:


Engine Model	Cylinder	Rod length(mm)	Big end bore(mm)	Big end width(mm)	Small end bore(mm)
M20	6	130	48	21.87	22
M20	6	135	48	21.87	22
M20	6	140	48	21.87	22
S54 E46 M3 (S54B32)	6	139	53	19.85	21
M3 S54	6	139	53	19.8	21
B30	6	142	53	21.85	21
M5 /M6 S38 B36 3.5L	6	144	52	23.9	22
E30 M3 S14 2.3L	4	144	52	23.9	22
E36 M50B25	6	135	48	21.79	22
M5 3.8L (S38B38)	6	142	52	23.9	22
4.0/4.4L V8 (M60B40)	8	143	52	20.85	22
M10 M30	6	135	52	23.9	22
N54B30	6	145	53.6	20.86	22
M5/M6 S-88	6	144	52	23.9	22

Please kindly explore as if you want. If not, welcome you to contact us directly

Set of 6, Hurricane Quality controled 4340 Chrome Moly Connecting Rods fits for BMW M30B28 M30B30 M30B32 M30B35 engines. Beside H-beam, X-beam, I-beam and custom rods could be produced and provided for you also



Shot penning the surface of the rod can relieve stress and improved fatigue life. H beam design provides higher compressive strength for high RPMs.

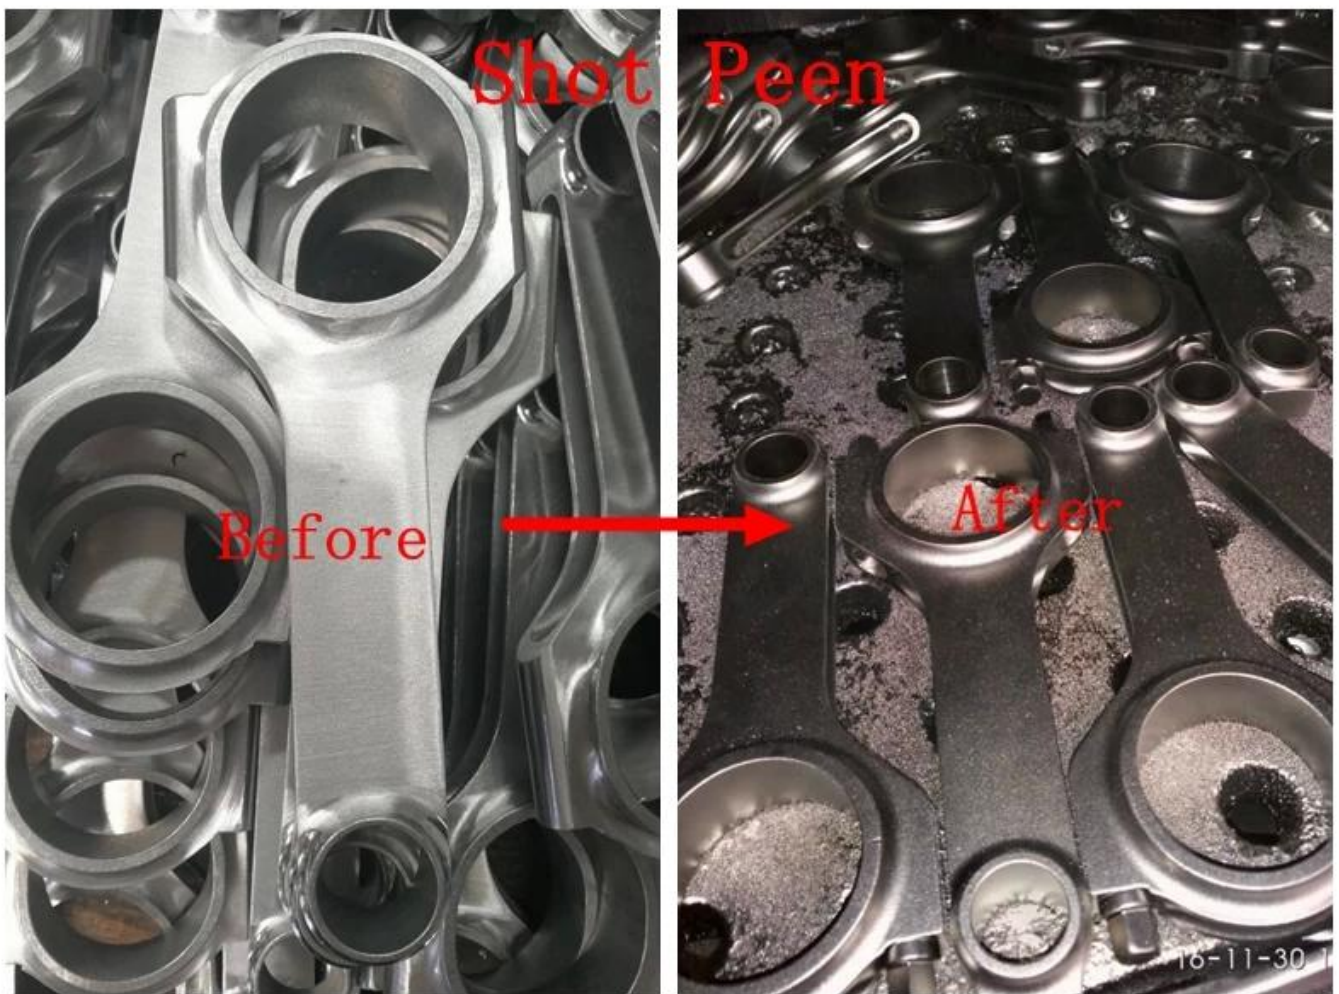

Note: more information about Shot Peening, please kindly explore "[What is shot peening?](#)"

If you have any comments, you can also find the helpful information at [FAQ](#) page.