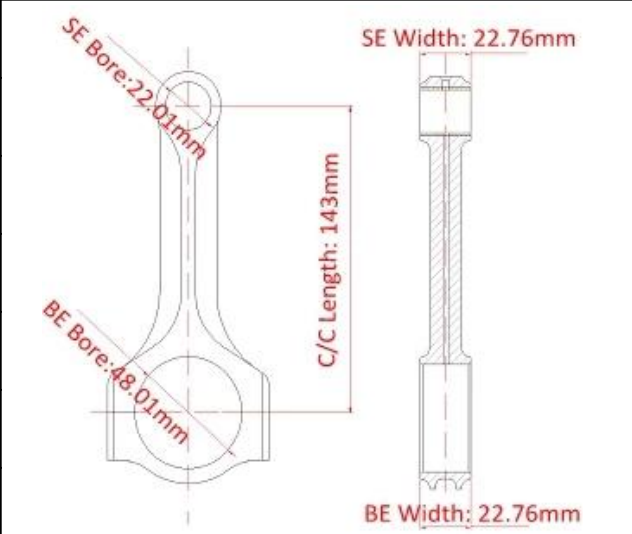


Nissan QR25DE X beam Connecting Rods Main Sizes

| | |
|--|--|
| Brand: Hurricane |  |
| Center to Center Length: 143mm/5.630" | |
| Big End Bore Diameter: 48.01mm/1.890" | |
| Big End Width: 22.76mm/0.896" | |
| Small End Bore Diameter: 20.01mm /0.788" | |
| Small End Width: 22.76mm/0.896" | |
| Beam Style: X-beam | |

Nissan QR25DE Forged Rods More Details

| | |
|-----------------------------------|---------------------------|
| Connecting Rod Bolt Diameter | 3/8 " |
| Approximate Connecting Rod Weight | xxxg |
| Advertised Horsepower Rating | 700hp |
| Quantity | Sold as 4 pieces /set |
| Material | Forged 4340 steel |
| Connecting Rod Finish | Shot-peened, Polished |
| Pin | Bronze wrist pin bushings |
| Wrist Pin Style | Floating |
| Cap Retention Style | Cap screw |
| Weight Matched Set | Yes ,Balanced +/- 1g |
| Magnafluxed | Yes |
| Private Label | Yes ,available |
| Custom design | Yes, accept |

Nissan QR25DE Performance Connecting Rods Features



Rods Features include:

1. 100% premium forged 4340 forged steel
2. Strict forge and heat treatment processed forgings, hardness of 34-38 HR C
3. Aluminium/Silicon/Bronz alloy bushing
4. 3D software re-designed critical C-bore area, special CNC machining ensure smooth connection and free of sharp edge, significantly improved strength
5. Perfectly fits ARP 2000 bolts (220,000PSI) or Cust. Age 625+ bolts (260,000PSI).
6. Accurate sized and edge chamfered dowel sleeve for easy and accurate re-assembling
7. Sunnen hone solution for all big bore and pin bore finishing
8. Enlarged mating surface increase mating area strength significantly and grinded mating surface makes re-assembling job accurate and easy
9. Fully shot peened to relieve stress
10. Optimal balancing for weight matched sets within +/-1g

11. Dimensionally Inspected

12. X beam rods are very strong and resist cracking.

If you have more questions, give us a short message here! (marketing@hurricane-rod.com.cn)