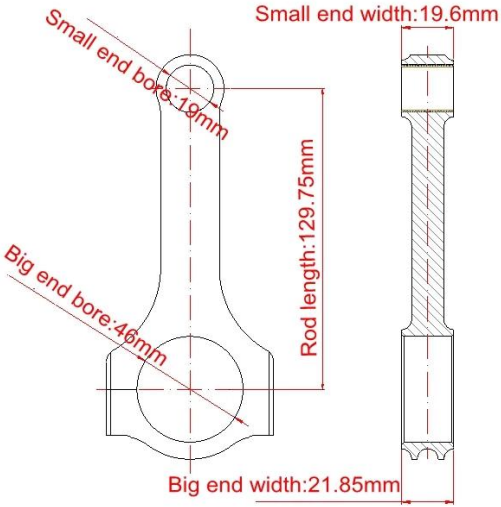


Opel Z16LEH / Z16 LER / Z16LET 1.6 16v rods Main Sizes

Brand: Hurricane	
Center to Center Length: 129.75mm/5.108"	
Big End Bore Diameter: 46mm/1.811"	
Big End Width: 21.85mm/0.860"	
Small End Bore Diameter: 19mm/0.748"	
Small End Width: 19.6mm /0.772"	
Beam Style: H-beam	

1.6L Turbo Opel Corsa D OPC Z16LER conrods Features

Connecting Rod Bolt Diameter	5/16"
Approximate Connecting Rod Weight	400g
Advertised Horsepower Rating	600hp
Quantity	Sold as 4 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes ,Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes ,available
Custom design	Yes, accept

Forged Connecting Rods for Opel Vauxhall Description

Hurricane Speed and Performanc Opel Z16LER rods are designed to with stand H-beam and assemble with the [ARP 2000 series 5/16" bolts](#). And if you need, You could use the ARP custom age bolts available.

All hurricane connecting rods are designed in factory directly to create many different components since 2000, this is why all rods can be made, included custom conrods. Our advantages: availability, ease of

fitment and size of range.

Opel H-Beam X-beam and I-Beam connecting rods are forged from AISI 4340 (En24/40CrNiMoA) steel. Heat treated to HRC 34-38 and then shot peened for a higher fatigue strength. Small ends are bushed for steel bushing, and big ends are fitted with high quality 8740, ARP2000 bolts.



Opel race car share

